



# Sara® Flex



Designed to make every-day transfer and care tasks easier, Sara Flex equips one caregiver with the ability to assist a patient or resident from a seated to a standing position, in one natural movement.

## ARJO MOBILITY GALLERY



C

C. Able to partially bear weight on at least one leg. Uses a wheelchair for moving a distance. Please contact Arjo for further information.

 View in AR



Visit the webpage



## KEY FEATURES

### SCALE (OPTION)

Built in electronic scale shows the patient's weight on the display of the hand control.

### CAREGIVER HANDLE

Curved handle enables the caregiver to choose where to hold.

### EASY-TO-USE HAND CONTROL WITH DISPLAY

The hand control is on a long flexible cord that enables the caregiver to stay close to the patient throughout the transfer.

### LOW HORIZONTAL FOOTPLATE

Keeping the patient's feet close to the ground means their knees are not raised too high, making the standing task easier.

### PATIENT HANDLE

The contrast-coloured angled patient handle positions the hands, wrists and elbows throughout the sit-to-stand movement.

### FLEXIBLE SILICONE LEG SUPPORT

Curved design with a soft and flexible surface that supports the lower legs and knees throughout the sit-to-stand movement.

Requiring no adjustments, the large surface caters for a broad range of patients while delivering good comfort.

### FLEXIBLE SILICONE LEG STRAP


Positioned low and with multiple adjustment options to ensure patients can be securely positioned from a seated to a standing position.

### TOTAL LOCK BRAKES


Both axis of the wheels are lockable.



## PRODUCT INFORMATION

GENERAL	
Maximum safe working load	200 kg (440 lbs)
Lift weight (incl battery)	53 kg (117 lbs)
Minimum total storage height	1162 mm (45 3/4")
Minimum lifting height	991 mm (39")
Maximum lifting height	1518 mm (59 3/4")
External width legs closed	660 mm (26")
External width legs open	1029 mm (40 1/2")
Internal width leg closed	530 mm (20 7/8")
Internal width leg open	899 mm (35 3/8")
Leg clearance (floor to top of legs)	108 mm (4 1/4")
Chassis clearance (floor to bottom of chassis)	23 mm (15/16")
Lift total length	996 mm (39 3/16")
Turning radius	1208 mm (47 9/16")
Lift protection class	IP24
Hand control protection class IPX7	IPX7
Battery 24V, 4 Ah	
Battery charge indicator	
Service meter - displays the total time in use (hours)	
Emergency stop and system failure override	
Automatic safety cut out if lowered onto an obstacle	
Low-friction castors, the rear two with brakes	
APPROVAL	
60601-1	
ISO 10535	
ELECTRICAL	
Degree of protection - electrical shock	Type BF
Lift - protection class	IP24
Hand control - protection class	IPX7 
Battery type	Rechargeable - sealed lead acid
Battery part number	NDA0100-20
Battery capacity	24V DC 4Ah
Battery charger	NDA8200
Lift - protection class - shock protection	Internally powered equipment
Lift nominal voltage	24V DC
Fuse	15A type AGC fuse
Operating force of controls	< 5 N
Maximum duty cycle, lift actuator	10% Maximum (2 min ON / 18 min OFF)
Maximum duty cycle, leg spread actuator	10% Maximum (2 min ON / 18 min OFF)
Maximum sound power level	50dB

## PRODUCT NOMENCLATURE

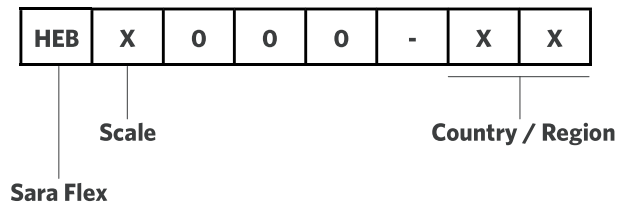

### SARA FLEX:



### SCALE:

0	None
1	Standard scale
2	Class III scale

### COUNTRY/REGION:

00	Central Warehouse (Bare product)
01	United State of America
02	Canada
03	Belgium
04	Switzerland
05	Germany
06	France
07	Netherlands
08	United Kingdom
09	Italy
10	Spain
12	Poland

### COUNTRY/REGION:

13	China
14	Middle East
15	Portugal
17	Czech Republic
19	Lithuania
20	Russia
21	Turkey
22	Australia
23	New Zealand
24	Slovakia
25	Austria
26	Hong Kong

### COUNTRY/REGION:

27	Singapore
28	Japan
29	Korea
30	India
31	South Africa
32	Nigeria
33	Brazil
34	Scandinavia
98	Europe
99	International
N/A	Europe + UK

General Note: Product and accessories availability may vary depending on your region.

## MOST COMMON SPARE PARTS AND ACCESSORIES

	ARTICLE #	DESCRIPTION
1	NDA0100-20	Battery pack
2	NDA8200-INT	Universal wall charger
3	000.20485	Caster with brake 100mm (2pcs)
4	000.20475	Caster 86 mm (2 pcs)
5	AH1001017	Leg (2 pcs)
6	700-27034	Leg Cover Kit Accessory
7	AH1002790	Mast
8	AH1001064	Lifting Arm Actuator
9	AH1003008	Mast Cover front
10	AH1003009	Mast Cover back
11	AH1002975	Maneuvering/Caregiver Handle
12	700-27044	Leg Strap attachment
13	700-27041	Central hook kit

This list represents the most frequently sold spare parts and/or accessories.  
For a complete list, refer to the product parts list.  
Document: #05.KL.00EN - Advantum: #100073250




## COMPATIBLE SLINGS

ARTICLE #	NAME	SIZE
MAA3060M	Transfer Sling, Roll	One size
MAA3061M	Transfer Sling, Flat	One size
MAA3070M	Standing Sling, Roll	One size
MAA3071M	Standing Sling, Flat	One size
MFA3000	SARA 3000 Flites	One size
TSS.500 → TSS.504	Sara 3000 Standing Sling with fixed support belt	S M L XL XXL
TSS.500S-IC → TSS.503S-IC	Sara 3000 Standing Sling with separate support belt 1 Clip closing	S M L XL
TSS.500W → TSS.503W	Wipeable Standing Clip Sling	S M L XL
TSS.501SV → TSS.502SV	Sara 3000 Standing Sling with separate support belt and hook and loop fastener	M L
TSS.511	SARA 3000 Transfer Sling	One size
TSS.501A → TSS.503A	Sling split hook and loop attachment 1 clip	M L XL

Note: Article numbers with "A-suffix" (e.g. TSS-501A) has a BAA (Buy American Act) compliant country of origin.

## SPACE REQUIREMENTS

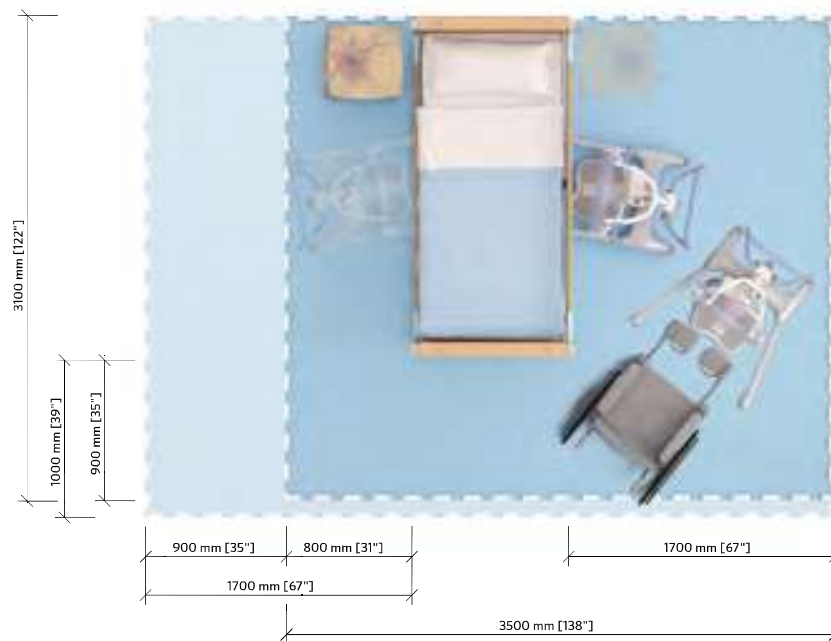

For more information about Space requirement, consult the Arjo Guide for Architects and Planners website.



- Blue area shows the minimum working area required for the staff to be able to use the floor lift in an ergonomic way from one side.
- Light blue area shows required extension of working area to facilitate activities from either side to provide adequate access for the patient, floor lift and assisting carer.