

## Auburndale Bench

### Dimensions:

Overall Height:	27"
Overall Depth:	24½"
Overall Width:	50½"
Seat Height:	20½"
Seat Depth:	19"
Seat Width:	44½"
Arm Height:	26½"
Bench Weight:	85 lbs.
Weight Capacity:	500 lbs.
COM Details*:	4 yds.



### Frames:

¾" plywood from managed sources. All joints are interlocking and/or glued, screwed and stapled for added strength and rigidity. Exposed wood frame with integrated legs and leg support.

### Seat & Back Suspension:

Fully upholstered with a foam covering over a high-tensile-strength steel zig-zag sprung platform.


### Seat & Backrest Cushion:

Dacron-wrapped 50 ILD/2.5 density HR poly foam.

### Finishing Process:

Sherwin Williams stain, sealer and topcoat. Topcoat consists of a high-solids, pre-catalyzed nitrocellulose lacquer that provides good chemical resistance with the ability to repair small damaged areas in the field.

### Finish Options:

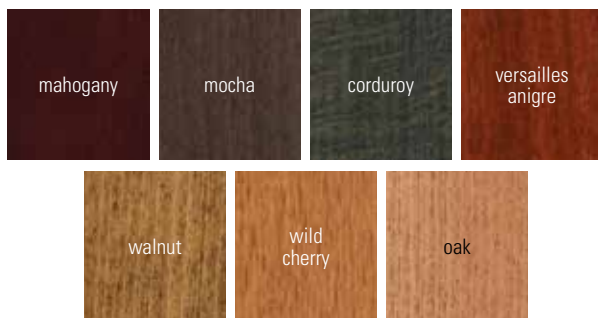

### Certifications:

CA117-2013 and TSCA Title VI certified. Chair passes BIFMA 5.5X Seating Standards. CA133 is available for an upcharge.

### Floor Glides:

Nail-in nylon floor glides.

### Customization:

Dual fabrics and contrasting welting are available for an upcharge.

### Warranty Information:

10-year limited warranty on the chair frame, seat foam and backrest foam. Fabric manufacturer's warranty on fabric.

### Packaging:

Bench ships upright in a box, wrapped in plastic. Legs are shipped attached.

\* Fabric requirement for one chair includes the seat and backrest.  
\* The estimated fabric requirement is based on 54"W material. The actual amount required may vary depending on pattern, pattern matching, material width or use of multiple fabrics.  
\* The fabric on the backrest is visible from the rear view of the chair.