

Fontenelle Overbed Light

LumaFuse™ material offers the durability of acrylic and warmth of fabric.

Features:

The Fontenelle Overbed Light features a contemporary style. The fixture is suited for horizontally mounting on indoor walls in larger spaces. Conveniently integrated pull chain switch operates the nightlight, uplight and downlight to fit resident and staff preferences.

Construction:

The housing is die-formed from 22-gauge steel and includes standard mounting holes and wiring access.

Finish:

Distressed Grey or Espresso finish.



Diffuser

The top and bottom diffuser is made from 0.110" white acrylic sheet. The front and sides are double laminated LumaFuse $^{\text{\tiny M}}$ fab in Jute or Linen White.

Electrical:

Input: 120VAC / 60 Hz, 0.7A Max Not compatible with dimmers.

Certification:

cETLus listed for damp locations and ADA compliant.

LED:

Integrated LED modules are capable of producing a total of 4050 source lumen for 38" or 5400 source lumen for 50" in 3000K CCT. Rated for 50,000 hours and 90 CRI.

Options:

4-Way Pull Switch or Wall Switch (refer to ordering information).

Warranty:

Limited warranty: This fixture is free from defects in materials and workmanship for a period of five years from date of purchase.

Specifications and dimensions subject to change without notice.








Espresso/Jute	LED	Source Lumen	CCT	Features	Dimensions
#L9972	60W	1350 up/2700 down	3000K	4-Way Pull Switch	38"L x 4"D x 5"H
#L9974	0000	1350 up/2700 down		Wall Switch	36 L X 4 D X 5 H
#L9976	00147			4-Way Pull Switch	50"L x 4"D x 5"H
#L9978	80W			Wall Switch	50 L X 4 D X 5 H



Fontenelle Overbed Light

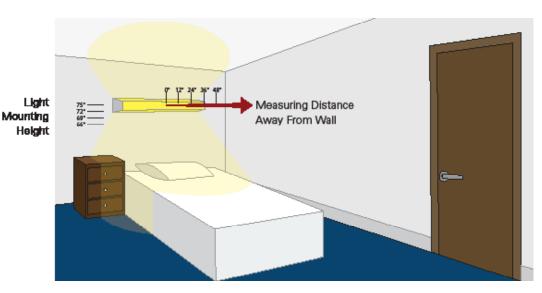

Foot-candles are measured at 66", 69", 72" and 75" heights and 0", 12", 24", 36" and 48" away from the wall. Three measurements at each height and distance are taken for the uplight, downlight and up/ downlight combination.

36" Fontenelle LED Overbed Light - Jute (UPLIGHT ONLY)

		ivieasuring Distance from wan						
		0"	12"	24"	36"	48"		
Mounting Height	75"	0.51	1.15	1.53	1.68	1.69		
	72"	0.55	1.58	2.01	2.02	1.88		
	69"	0.58	1.67	2.17	2.22	1.95		
Σ	66"	0.61	1.48	2.33	2.29	1.93		

36" Fontenelle LED Overbed Light - Jute (DOWNLIGHT ONLY)

		ivieasuring Distance from wall						
		0"	12"	24"	36"	48"		
ng t	75"	20.80	36.50	36.60	29.80	22.70		
声등	72"	27.10	44.50	42.60	33.10	24.30		
<u>e</u> . ĕ	69"	31.60	52.00	47.60	35.30	25.00		
ĕ∸	66"	38.50	61.90	53.30	37.50	25.60		

36" Fontenelle LED Overbed Light - Jute (UPLIGHT & DOWNLIGHT)

		Weasuring Distance nom wan						
		0"	12"	24"	36"	48"		
ng t	75"	21.80	37.70	38.50	31.80	24.30		
.≘ i⊆ 7	72"	26.80	45.70	44.60	35.20	26.10		
Mount Heig	69"	31.60	53.00	49.40	37.10	26.80		
ĕ≖	66"	39.10	63.10	55.20	39.70	27.70		

48" Fontenelle LED Overbed Light - Jute (UPLIGHT ONLY)

		Measuring Distance from Wan							
		0"	12"	24"	36"	48"			
ng t	75"	1.76	2.42	2.69	2.55	2.31			
untin leight	72"	1.82	2.77	3.05	2.77	2.45			
	69"	1.90	3.00	3.24	2.91	2.45			
ĕ⊤	66"	1.98	2.88	3.41	2.96	2.45			

48" Fontenelle LED Overbed Light - Jute (DOWNLIGHT ONLY)

		ivieasuring Distance from wall						
		0"	12"	24"	36"	48"		
ounting leight	75"	40.60	44.50	39.10	28.30	20.50		
	72"	45.60	50.20	42.20	29.50	20.70		
	69"	52.60	58.10	45.50	30.20	20.60		
ĕ∸	66"	60.00	66.10	49.80	30.40	20.40		

48" Fontenelle LED Overbed Light - Jute (UPLIGHT & DOWNLIGHT)

		Measuring Distance from Wall					
		0"	12"	24"	36"	48"	
ounting leight	75"	42.10	46.70	41.90	31.10	22.30	
	72"	47.20	53.00	44.70	32.70	24.20	
	69"	55.00	61.60	49.70	33.50	23.20	
žΤ	66"	61.90	69.30	52.70	33.70	22.60	

36" Fontenelle LED Overbed Light - Linen White (UPLIGHT ONLY) Measuring Distance from Wall

		ivicasuming Distance nom vvan						
		0"	12"	24"	36"	48"		
ounting leight	75"	0.73	1.50	2.24	2.40	2.23		
	72"	0.82	1.81	2.56	2.64	2.38		
	69"	0.93	2.01	2.79	2.79	2.43		
ž	66"	1.11	2.34	3.12	2.94	2.48		

36" Fontenelle LED Overbed Light - Linen White (DOWNLIGHT ONLY)

		ivieasuring Distance nom wan						
		0"	12"	24"	36"	48"		
ounting leight	75"	28.50	48.00	44.40	35.10	26.10		
	72"	34.70	56.60	49.90	38.30	27.30		
	69"	42.00	67.40	56.50	41.30	28.50		
ĕ∸	66"	52.10	78.90	62.30	43.00	29.30		

36" Fontenelle LED Overbed Light - Linen White (UPLIGHT & DOWNLIGHT)

		Wicasaring Distance noin Wan						
		0"	12"	24"	36"	48"		
lounting Height	75"	29.20	49.20	46.40	37.10	28.30		
	72"	34.80	58.30	52.80	40.50	29.70		
	69"	42.30	68.80	59.40	43.80	30.90		
ĕ∸	66"	53.20	81.40	65.80	46.60	31.80		

48" Fontenelle LED Overbed Light - Linen White (UPLIGHT ONLY)

		M	easuring	Distance	from Wa	II
		0"	12"	24"	36"	48"
<u>و</u> .	75"	1.52	2.30	2.71	2.62	2.38
ountin leight	72"	1.59	2.63	3.14	2.90	2.56
	69"	1.69	2.91	3.38	3.08	2.59
ĔΤ	66"	1.67	2.69	3.56	3.14	2.53

48" Fontenelle LED Overbed Light - Linen White (DOWNLIGHT ONLY) Measuring Distance from Wall

		Wicasaring Distance noni Wan							
		0"	12"	24"	36"	48"			
lounting Height	75"	45.00	51.00	47.00	34.90	25.90			
	72"	49.30	57.10	51.40	36.80	26.80			
	69"	58.00	66.40	55.70	38.60	26.60			
ĔΤ	66"	64.70	74.70	59.00	38.20	25.80			

48" Fontenelle LED Overbed Light - Linen White (UPLIGHT & DOWNLIGHT)

		Measuring Distance from Wall				
		0"	12"	24"	36"	48"
Mounting Height	75"	45.60	52.80	48.80	37.40	28.30
	72"	51.50	59.90	54.10	39.90	28.70
	69"	60.10	69.30	59.20	41.10	29.00
	66"	65.20	77.30	63.50	42.10	28.50



