SPEED QUEEN ON-PREMISES LAUNDRY

FRONT CONTROL LDEE5BGS173TW01, LDEE5BGS153TW01, LDGE5BGS113TW01 SINGLE DRYER

Single Dryers

With an easy-to-clean large lint compartment and a reversible door to accommodate your laundry design, Speed Queen® single dryers are designed to suit your laundry's specific needs. The 2.06 sq. ft. door opening is the largest in the industry, providing easy loading and unloading.

- Durable galvanized steel cylinder with an extra-large 7 cu. ft. of volume.
- Efficient dryer heating with 25,000 Btu (gas models) and 5,320 Watts (electric models).





Electronic Homestyle


Speed Queen® dryers with Electronic Homestyle controls are designed for durability and are easy to operate with intuitive selection buttons and cycle status indicator lights. This control option features a time-remaining display, six preset cycle buttons, cycle adjustability for temperature and load size.



SPECIFICATIONS

SINGLE DRYER

MODEL	LDEFEROS172TW01
MODEL	LDEE5BGS173TW01, LDGE5BGS153TW01, LDGE5BGS113TW01
CONTROL OPTION	Electronic Homestyle
CONTROL LOCATION	Front
CAPACITY - lb (kg)	18 (8.2)
CYLINDER VOLUME - cu. ft. (liters)	7.0 (198)
OVERALL WIDTH - in (mm)	26 7/8 (683)
OVERALL DEPTH - in (mm)	28 (711)
OVERALL HEIGHT - in (mm)	40 7/16 (1027)
MOTOR POWER CONSUMPTION - hp (kw) VARIABLE SPEED INDUCTION	1/3 (0.25)
AVAILABLE HEAT SOURCES	Gas or Electric
AVAILABLE HEATING ELEMENT (Electric W)	5350 @ 240V
GAS INLET CONNECTION - in (mm)	3/8 (9.5)
GAS CONSUMPTION - BTU/Hr	22,500
EXHAUST OUTLET DIA in (mm)	4 (102)
EXHAUST AIRFLOW - cfm (liters/sec)	220 (105)
*AVAILABLE CYCLES	Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up
CYCLE INDICATOR LIGHTS	Yes
CYLINDER FINISH	Galvanized
AVAILABLE COLORS	White
DOOR TYPE (Solid/Window)	Solid
AVAILABLE ELECTRICAL Electr	ic 120/240/60/1-30
REQUIREMENTS - Voltage/Hz/Ph - Circuit Amperage	as 120/60/1 - 15
SHIPPING DIMENSIONS Wid	th 29 (737)
APPROX in (mm)	th 32 3/4 (832)
Heig	ht 45 1/2 (1156)
NET WEIGHT - Ib (kg) Electr	ic 145 (66)
Gá	as 150 (68)
SHIPPING WEIGHT - lb (kg) Electr	ic 155 (70)
Gá	as 160 (73)
AGENCY APPROVALS Electr	ic cULus
Ga	es cCSAus

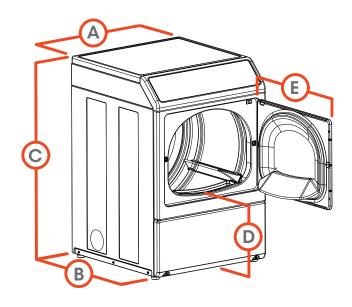

Α.	OVERALL WIDTH - in (mm)	26 7/8 (683)
B.	OVERALL DEPTH - in (mm)	28 (711)
C.	OVERALL HEIGHT - in (mm)	40 7/16 (1027)
D.	FLOOR TO DOOR OPENING - in (mm)	15 7/16 (392)
E.	DOOR SWING - in (mm)	23 1/2 (597)

ADA Compliant

 $Note: Not all \ options \ are \ available \ for \ all \ models. \ Refer \ to \ the \ price \ list \ for \ the \ available \ models \ and \ options.$

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.



 $^{^{\}star}$ Information shown applies to highest end control available.