


# AMANA Through the Wall (TTW) R32 Unit Power Cord Installation Instruction


1) Remove the front grille by pulling from both side from the front of the unit. Remove the front cover by removing the two screws from the bottom of the front cover and pulling forward and upward. You should be able to access the control box now on the left side of the unit.




2-a) Screw the power cord grommet at slot assigned in control box as shown in image below.

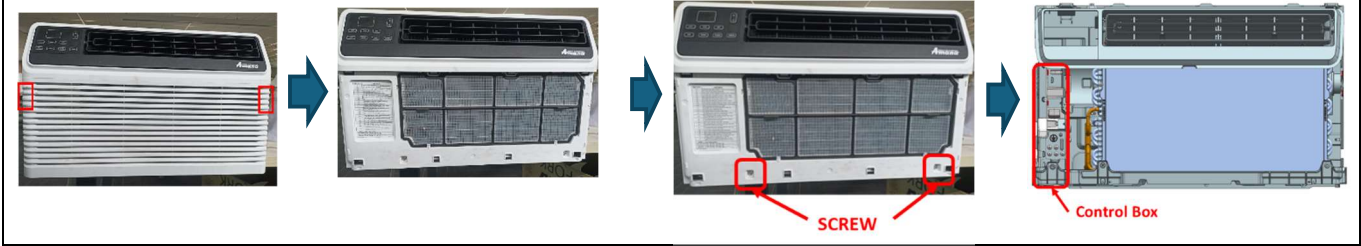


2-b) Screw the ground wire [Green] of power cord to the ground plate on control box assembly as shown in image below.

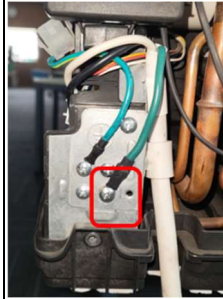

2-c) Open the control box by releasing the two snap fit tabs at the top of the control box.

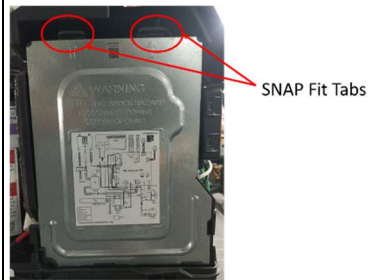

3-a) Connect the LCDI power cord Molex male connector to the Molex female connector of power cord extension harness already connected to the terminal block in the control box assembly.

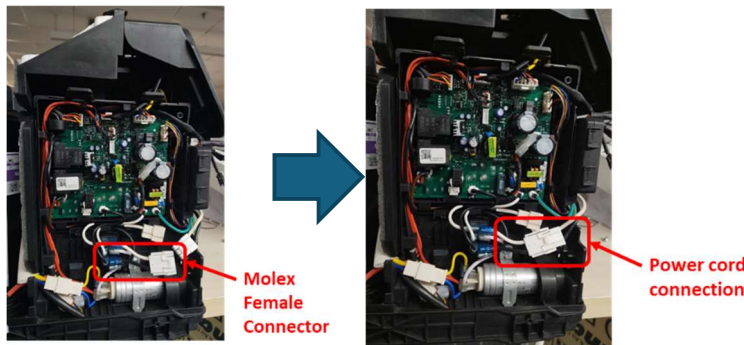

3-b) Close the control box properly after connection ensuring the power cord wires coming out of control box are routed through the groove provided on side and are not crimped.



4) Place the front cover on the unit. Route the power cord from the bottom groove (towards control box) of the front cover. Complete the assembly by adding the two screws and the front grille back on the front cover.

