



Claiborne Overbed Light

Black	Satin Nickel	LED	Delivered Lumens	Adjustable CCT	L	H	D
#3KMFD	#3KMFF	58W	4100	2700K/3000K/3500K/4000K/5000K	36"	4¼"	5"
#3KMFG	#3KMFH	68W	4900	2700K/3000K/3500K/4000K/5000K	48"	4¼"	5"

Features:

A white acrylic diffuser with a wraparound metal frame provides a soft glow accent to this contemporary wall mount senior care overbed light. The Claiborne includes a 4-way pull switch, standard (120 volt only).

Construction:


The light wiring channel is formed from 22-gauge steel and is provided with keyhole mounting slots and wiring access. Fixture can mount horizontally only. Power connections can be made in the fixture wiring channel or in a standard junction box (not included).

Diffuser:

White acrylic. Frame mounts to electrical channel with two decorative screws.

Finish:

Black or Satin Nickel finish.



Electrical:

Input 120VAC / 60Hz. Provides 50 footcandles of reading light over bed. 4-way pull-switch is included. Nightlight User accessible CCT switch. Not compatible with dimmers.

LED:

Integrated LED modules capable of producing:
58W = 4100 delivered lumens
68W = 4900 delivered lumens
Adjustable CCT - 2700K/3000K/3500K/4000K/5000K
Rated for 50,000 Hrs., 80 CRI.

Certification:

cETLus listed for damp locations and ADA compliant.


Options:

4-Way Pull Switch (refer to ordering information).

Warranty:

Limited warranty: This fixture is free from defects in materials and workmanship for a period of five years from date of purchase. Specifications and dimensions subject to change without notice.

Claiborne Overbed Light

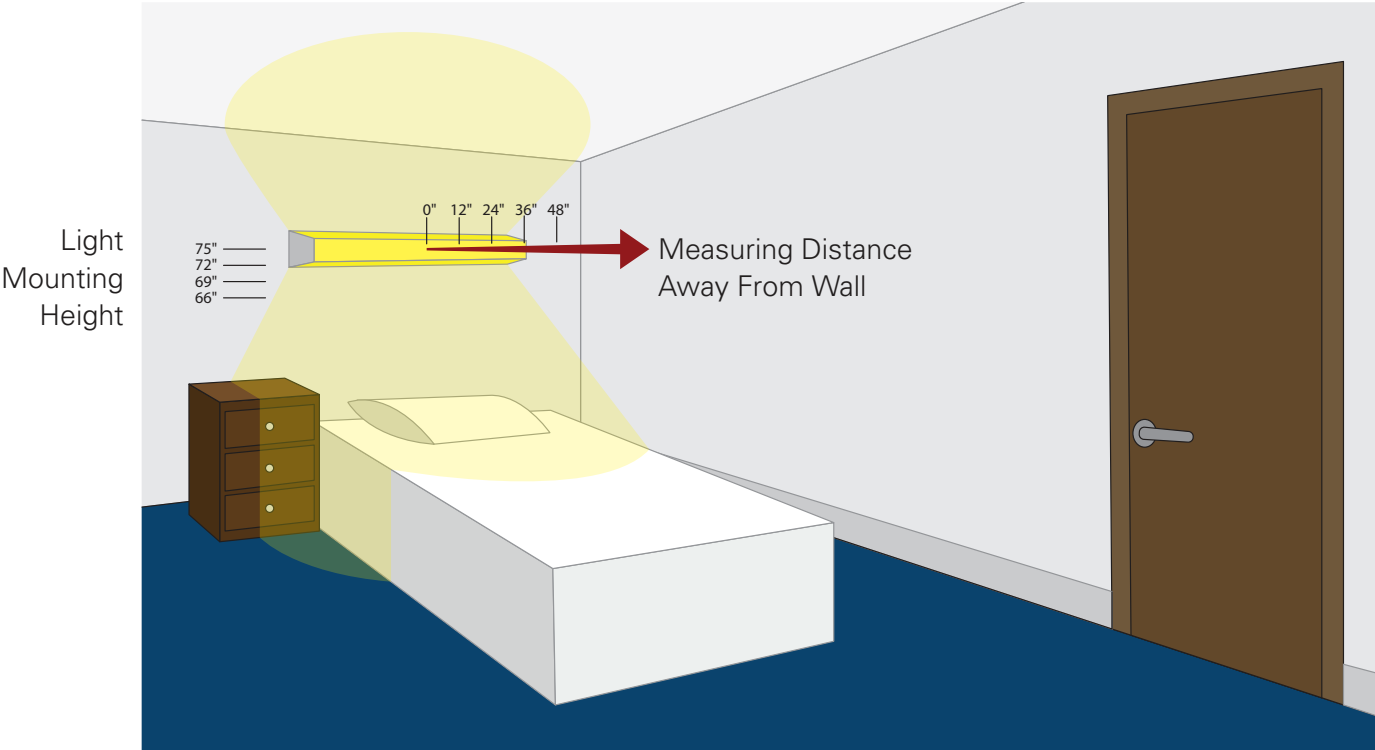

Foot-candles are measured at 66", 69", 72" and 75" heights and 0", 12", 24", 36" and 48" away from the wall. Three measurements at each height and distance are taken for the uplight, downlight and up/downlight combination.

36" Claiborne overbed (UPLIGHT ONLY)

		Measuring Distance				
		0	12"	24"	36"	48"
Mounting Height	6'3"	0.53	1.46	1.88	2.09	2.26
	6'0"	0.58	1.36	1.78	2.08	2.21
	5'9"	0.63	1.25	1.67	2.06	2.17
	5'6"	0.70	1.14	1.55	2.05	2.12

48" Claiborne overbed (UPLIGHT ONLY)

		Measuring Distance				
		0	12"	24"	36"	48"
Mounting Height	6'3"	0.74	1.83	1.96	2.31	2.76
	6'0"	0.68	1.74	1.92	2.27	2.58
	5'9"	0.59	1.65	1.83	2.24	2.49
	5'6"	0.52	1.54	1.74	2.19	2.42

36" Claiborne overbed (DOWNLIGHT ONLY)

		Measuring Distance				
		0	12"	24"	36"	48"
Mounting Height	6'3"	29.90	50.40	51.40	43.00	32.90
	6'0"	35.70	57.70	58.00	47.10	34.00
	5'9"	41.40	64.10	64.30	52.10	36.20
	5'6"	46.50	71.20	73.90	54.30	38.90

48" Claiborne overbed (DOWNLIGHT ONLY)

		Measuring Distance				
		0	12"	24"	36"	48"
Mounting Height	6'3"	34.60	53.40	53.20	46.70	34.20
	6'0"	38.20	59.90	62.30	51.20	36.20
	5'9"	43.50	67.30	69.20	53.40	37.30
	5'6"	42.60	73.20	75.30	56.70	39.40

36" Claiborne overbed (UPLIGHT & DOWNLIGHT)

		Measuring Distance				
		0	12"	24"	36"	48"
Mounting Height	6'3"	29.80	50.90	52.30	45.20	34.50
	6'0"	36.10	58.40	59.40	48.30	36.40
	5'9"	42.30	66.70	65.90	53.20	39.10
	5'6"	47.60	73.20	74.30	56.70	42.50

48" Claiborne overbed (UPLIGHT & DOWNLIGHT)

		Measuring Distance				
		0	12"	24"	36"	48"
Mounting Height	6'3"	35.10	54.20	60.30	48.20	38.20
	6'0"	40.20	61.20	65.20	50.10	35.40
	5'9"	43.60	67.50	70.40	53.80	34.30
	5'6"	48.20	73.40	75.20	57.10	31.20

Maxwell Thomas
By Direct Supply

1-800-889-3957 maxwellthomas.com